


Data sheet - Cam Follower KRVE72PP (full needle, eccentric bush, seal)

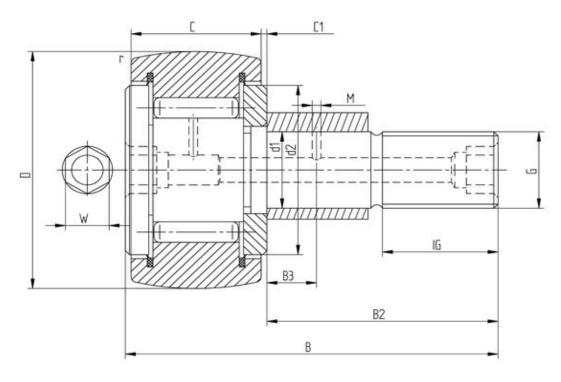

| Designation | KRVE72PP |
|-----------------------|----------|
| D [mm] | 72 |
| d1 [mm] | 24 |
| B [mm] | 80 |
| B2 [mm max.] | 49,5 |
| B3 [mm] | 11 |
| C [mm] | 29 |
| C1 [mm] | 0,8 |
| r [mm] | 1,1 |
| d2 [mm] | 44 |
| M [mm] | 4 |
| G | M24x1,5 |
| IG [mm] | 25 |
| W [mm] | 8 |
| Eccentric bush de [mm | 28 |
| Eccentric bush Be [mm | 122 |
| Eccentric bush e [mm] | 1 |
| Dynamic load Crw [N] | 37000 |
| Static load C0rw [N] | 85000 |
| Speed limit [min-1] | 2200 |

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.

© 2020 by STI Bearings GmbH Reproduction, even excerpts, only with our approval.