


Data sheet Support roller NATR 15 (crowned, with axial guidance, cage)

| Designation | NATR 15 |
|---------------------|---------|
| Type | crowned |
| D [mm] | 35 |
| d [mm] | 15 |
| d1 [mm max.] | 27 |
| B1 [mm] | 19 |
| B [mm] | 18 |
| r [mm] | 0,6 |
| Dynamic load Crw[N] | 9700 |
| Static load COrw[N] | 14100 |
| Speed limit [min-1] | 7000 |
| Speed limit [min-1] | 6500 |

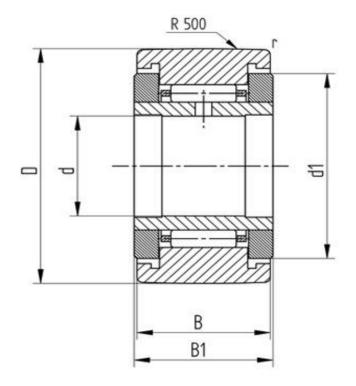

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.

© 2020 by STI Bearings GmbH
Reproduction, even excerpts, only with our approval.