


Data sheet
Support roller NATR 20 (crowned, with axial guidance, cage)

Designation	NATR 20
Type	crowned
D [mm]	47
d [mm]	20
d1 [mm max.]	37
B1 [mm]	21
B [mm]	24
r [mm]	1
Dynamic load Crw[N]	15500
Static load C0rw[N]	25500
Speed limit [min ⁻¹]	4900
Speed limit [min ⁻¹]	4700

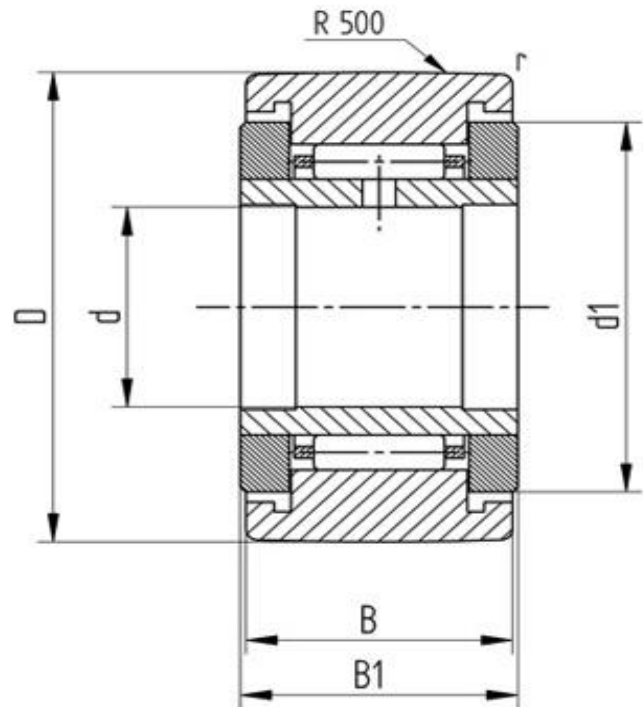

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.
 © 2020 by STI Bearings GmbH
 Reproduction, even excerpts, only with our approval.