


Data sheet

Support roller NATV 25 X (cylindrical, with axial guidance, full needle)

Designation	NATV 25 X
Type	cylindrical
D [mm]	52
d [mm]	25
d1 [mm max.]	42
B1 [mm]	25
B [mm]	24
r [mm]	1
Dynamic load Crw[N]	20500
Static load C0rw[N]	44000
Speed limit [min-1]	2100
Speed limit [min-1]	2500

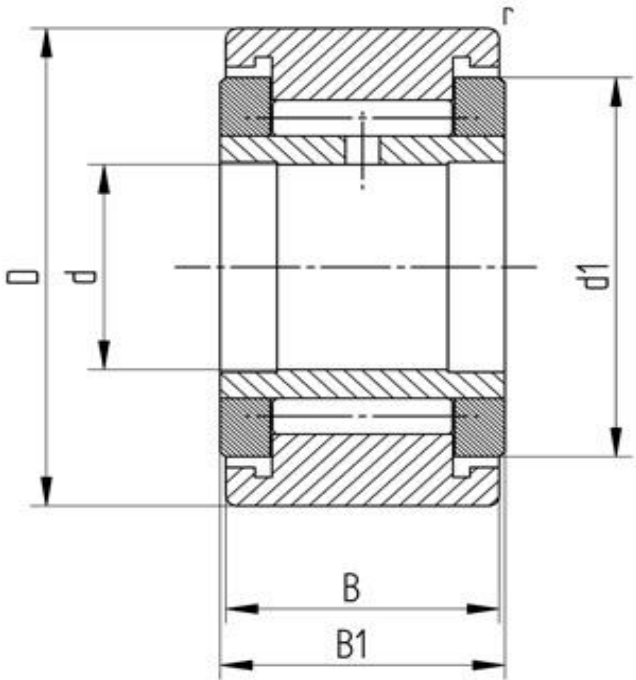

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.

© 2020 by STI Bearings GmbH  
Reproduction, even excerpts, only with our approval.