


Data sheet
Support roller NATV 15 PP X (cylindrical, with axial guidance, full needle, seal)

Designation	NATV 15 PP X
Type	cylindrical
D [mm]	35
d [mm]	15
d1 [mm max.]	27
B1 [mm]	19
B [mm]	18
r [mm]	0,6
Dynamic load Crw[N]	12800
Static load C0rw[N]	23000
Speed limit [min-1]	3400
Speed limit [min-1]	5500

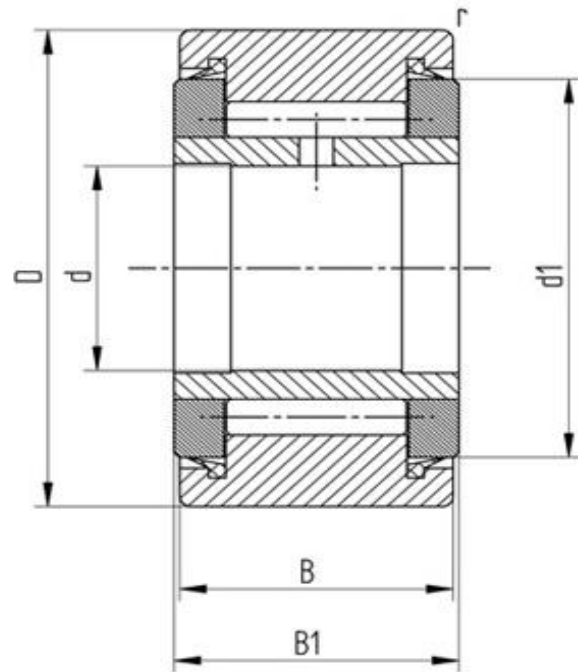

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.
 © 2020 by STI Bearings GmbH
 Reproduction, even excerpts, only with our approval.