


Data sheet
Support roller NATV 20 PP X (cylindrical, with axial guidance, full needle, seal)

Designation	NATV 20 PP X
Type	cylindrical
D [mm]	47
d [mm]	20
d1 [mm max.]	37
B1 [mm]	25
B [mm]	24
r [mm]	1
Dynamic load Crw[N]	20600
Static load C0rw[N]	42000
Speed limit [min ⁻¹]	2600
Speed limit [min ⁻¹]	3600

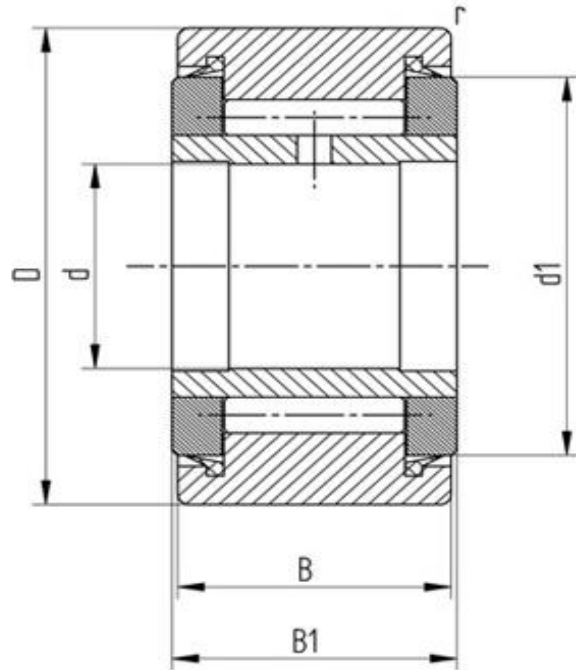

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.
 © 2020 by STI Bearings GmbH
 Reproduction, even excerpts, only with our approval.