


Data sheet

Support roller NUTR 25 X (cylindrical, with axial guidance, labyrith seal)

Designation	NUTR 25 X
Type	cylindrical
D [mm]	52
d [mm]	25
d1 [mm max.]	31
B1 [mm]	25
B [mm]	24
r [mm]	1
r1 [mm]	0,3
Dynamic load Crw[N]	29000
Static load	37500
Speed limit [min-1]	3400

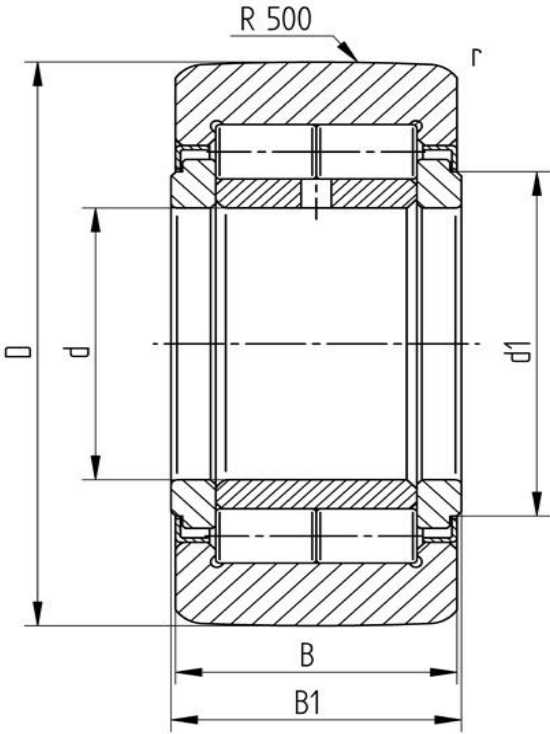

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.

© 2020 by STI Bearings GmbH

Reproduction, even excerpts, only with our approval.