


Data sheet - Support roller STO 15TN (crowned, with inner ring)

Designation	STO 15
Type	crowned
D [mm]	35
d [mm]	15
F, Fw * [mm max.]	20
B1 [mm]	12
B [mm]	11,8
d1 [mm]	26
r [mm]	0,3
Dynamic load Crw [N]	9100
Static load C0rw [N]	10700
Speed limit [min-1]	6500

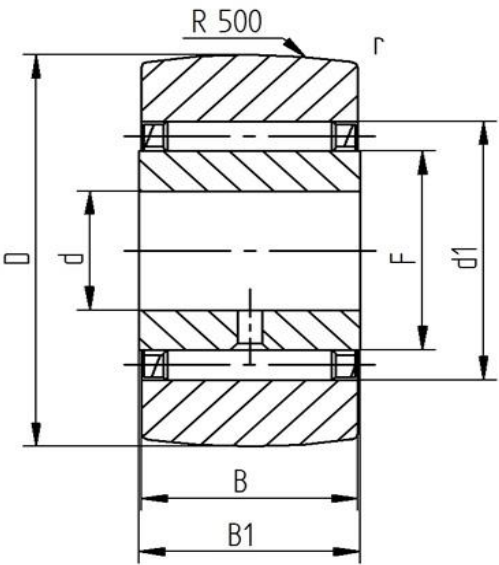

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.
 © 2020 by STI Bearings GmbH
 Reproduction, even excerpts, only with our approval.