


Data sheet - Support roller STO 8TN (crowned, with inner ring)

Designation	STO 8TN
Type	crowned
D [mm]	24
d [mm]	8
F, Fw * [mm max.]	12
B1 [mm]	10
B [mm]	9,8
d1 [mm]	15
r [mm]	0,3
Dynamic load Crw [N]	4200
Static load C0rw [N]	5500
Speed limit [min-1]	16000

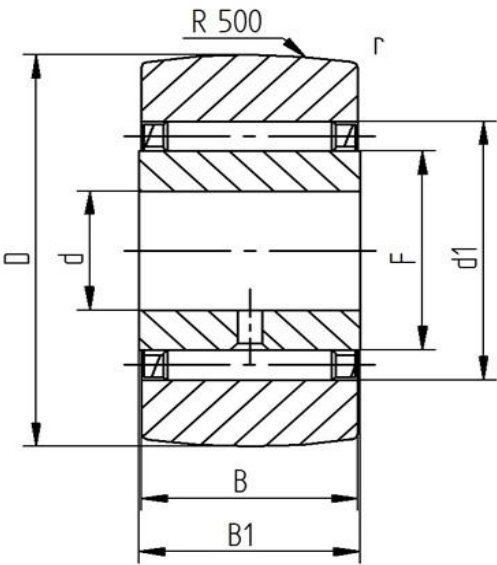

Every specification has been edited and verified carefully. STI Bearings GmbH assumes no liability for potential errors or incompleteness. Technical modifications are subject of changes.
© 2020 by STI Bearings GmbH
Reproduction, even excerpts, only with our approval.